


### RIPIANO / TOP / TISCHPLATTE / PLATEAU / SOBRE

## CFC

design Pedrali R&D

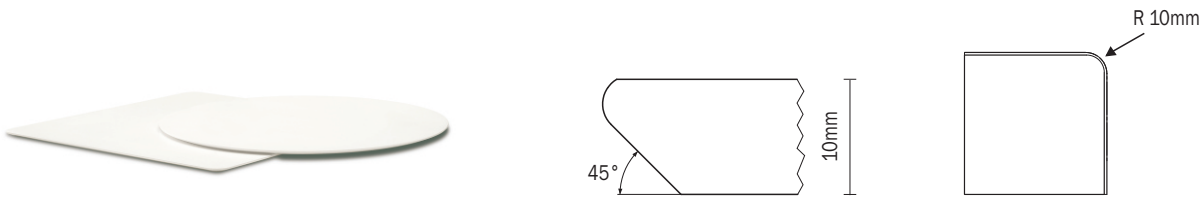

<b>MATERIALE STRATO SUPERFICIALE</b> Material / Material / Matériau couche superficielle / Material	<b>Laminato, finitura gofrata</b> Laminate, textured finish / Laminatplatte, texturisiert / Stratifié, finition gaufrée / Laminado, acabado gofrado
<b>ANIMA</b> Core / Kern / Coeur / Alma	<b>Bianca</b> White / Weißer / Blanc / Blanca
<b>BORDO</b> Edge / Kante / Chant / Canto	<b>Inclinato</b> Chamfered / Geneigte / Incliné / Inclinado
<b>SPESSORE</b> Thickness / Stärke / Épaisseur / Espesor	<b>10 mm (Tolleranza dimensionale ± 0,70 mm / Dimensional tolerance ± 0,70 mm)</b>
<b>MISURE</b> Sizes / Abmessungen / Dimensions / Medidas	<p>* <b>Tolleranza dimensionale ± 5 mm / Dimensional tolerance ± 5 mm</b></p> <p><b>Tondo</b> / Round / Runder / Rond / Redondo:          Ø490 mm - Ø590 mm - Ø690 mm - Ø790 mm - Ø890 mm - Ø990 mm - Ø1190 mm - Ø1290 mm</p> <p><b>Quadrato</b> / Square / Viereckig / Carré / Cuadrado:          590x590 mm - 690x690 mm - 790x790 mm - 890x890 mm</p> <p><b> Rettangolare</b> / Rectangular / Rechteckig / Rectangulaire / Rectangular:          1190x790 mm - 1290x790 mm</p> <p><b>Ellittico</b> / Elliptical / Elliptisches / Elliptique / Elíptico:          1200x800 mm - 1600x950 mm - 1800x1100 mm</p>
<b>UTILIZZO</b> Usage / Verwendung / Usage / Uso	<b>Indoor &amp; outdoor</b>
<b>NORMATIVE</b> Regulations / Bestimmungen / Réglementations / Normativas	<p><b>Resistenza all'abrasione EN 438-2.10 (Giri IP ≥ 150 e ≥ 350) / Resistance to surface wear EN 438-2.10 (Revs IP ≥ 150 e ≥ 350)</b></p> <p><b>Resistenza al calore secco (180°C) EN 438-2.16 (grado ≥ 4) / Resistance to dry heat (180°C) EN 438-2.16 (rating ≥ 4)</b></p> <p><b>Resistenza al vapore acqueo EN 438-2.14 (grado 4) / Resistance to water vapour EN 438-2.14 (rating 4)</b></p> <p><b>Resistenza al graffio EN 438-2.25 (grado ≥ 3) / Resistance to scratching EN 438-2.25 (rating ≥ 3)</b></p> <p><b>Resistenza alle macchie EN 438-2.26 (grado 5) / Resistance to staining EN 438-2.26 (rating 5)</b></p> <p><b>Solidità dei colori alla luce EN 438-2.27 (superficie 4) / Lightfastness EN 438-2.27 (surface 4)</b></p> <p><b>Resistenza alle bruciature di sigaretta EN 438-2.30 (grado ≥ 3) / Resistance to cigarette burns EN 438-2.30 (rating ≥ 3)</b></p>