


RIPIANO / TOP / TISCHPLATTE / PLATEAU / SOBRE

COI_BIANCO

design Pedrali R&D

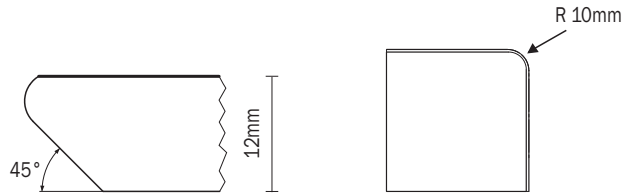

MATERIALE STRATO SUPERFICIALE Material / Material / Matériau couche superficielle / Material	Laminato, finitura gofrata Laminate, textured finish / Laminatplatte, texturisiert / Stratifié, finition gaufrée / Laminado, acabado gofrado
ANIMA Core / Kern / Coeur / Alma	Nera Black / Schwarz / Noir / Negra
BORDO Edge / Kante / Chant / Canto	Inclinato Chamfered / Geneigte / Incliné / Inclinado
SPESSORE Thickness / Stärke / Épaisseur / Espesor	12 mm (Tolleranza dimensionale ± 0,60 mm / Dimensional tolerance ± 0,60 mm)
MISURE Sizes / Abmessungen / Dimensions / Medidas	* Tolleranza dimensionale ± 5 mm / Dimensional tolerance ± 5 mm Tondo / Round / Runder / Rond / Redondo: Ø490 mm - Ø590 mm - Ø690 mm - Ø790 mm - Ø890 mm - Ø990 mm - Ø1190 mm Quadrato / Square / Viereckig / Carré / Cuadrado: 590x590 mm - 690x690 mm - 790x790 mm - 890x890 mm Rettangolare / Rectangular / Rechteckig / Rectangulaire / Rectangular: 1090x690 mm - 1190x790 mm - 1290x790 mm - 1350x790 mm - 1590x790 mm
UTILIZZO Usage / Verwendung / Usage / Uso	Indoor & outdoor
NORMATIVE Regulations / Bestimmungen / Réglementations / Normativas	Resistenza all'abrasione EN 438-2.10 (Giri IP ≥ 150 e A ≥ 350) / Resistance to surface wear EN 438-2.10 (Revs IP ≥ 150 e A ≥ 350) Resistenza al calore secco (180°C) EN 438-2.16 (grado ≥ 4) / Resistance to dry heat (180°C) EN 438-2.16 (rating ≥ 4) Resistenza al calore umido (100°C) EN 12721 (grado ≥ 4) / Resistance to wet heat (100°C) EN 12721 (rating ≥ 4) Resistenza al graffio EN 438-2.25 (grado ≥ 3) / Resistance to scratching EN 438-2.25 (rating ≥ 3) Resistenza alle macchie EN 438-2.26 (grado 5) / Resistance to staining EN 438-2.26 (rating 5) Solidità dei colori alla luce EN 438-2.27 (grado ≥ 4) / Lightfastness EN 438-2.27 (rating ≥ 4) Resistenza alle bruciature di sigaretta EN 438-2.30 (grado ≥ 3) / Resistance to cigarette burns EN 438-2.30 (rating ≥ 3)