


### RIPIANO / TOP / TISCHPLATTE / PLATEAU / SOBRE

## COI\_NERO

design Pedrali R&D

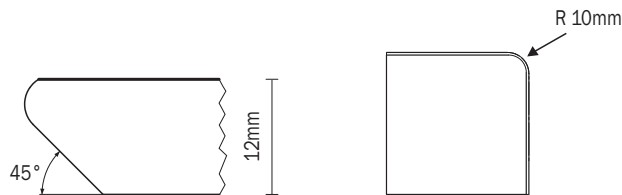

<b>MATERIALE STRATO SUPERFICIALE</b> Material / Material / Matériau couche superficielle / Material	<b>Laminato, finitura gofrata</b> Laminate, textured finish / Laminatplatte, texturisiert / Stratifié, finition gaufrée / Laminado, acabado gofrado
<b>ANIMA</b> Core / Kern / Coeur / Alma	<b>Nera</b> Black / Schwarz / Noir / Negra
<b>BORDO</b> Edge / Kante / Chant / Canto	<b>Inclinato</b> Chamfered / Geneigte / Incliné / Inclinado
<b>SPESSORE</b> Thickness / Stärke / Épaisseur / Espesor	<b>12 mm (Tolleranza dimensionale ± 0,60 mm / Dimensional tolerance ± 0,60 mm)</b>
<b>MISURE</b> Sizes / Abmessungen / Dimensions / Medidas	* <b>Tolleranza dimensionale ± 5 mm / Dimensional tolerance ± 5 mm</b>  <b>Tondo / Round / Runder / Rond / Redondo:</b> Ø490 mm - Ø590 mm - Ø690 mm - Ø790 mm - Ø890 mm - Ø990 mm - Ø1190 mm <b>Quadrato / Square / Viereckig / Carré / Cuadrado:</b> 590x590 mm - 690x690 mm - 790x790 mm - 890x890 mm <b> Rettangolare / Rectangular / Rechteckig / Rectangulaire / Rectangular:</b> 1090x690 mm - 1190x790 mm - 1290x790 mm - 1350x790 mm - 1590x790 mm
<b>UTILIZZO</b> Usage / Verwendung / Usage / Uso	<b>Indoor</b>
<b>NORMATIVE</b> Regulations / Bestimmungen / Réglementations / Normativas	<b>Resistenza all'abrasione EN 438-2.10 (Giri IP ≥ 150 e A ≥ 350) / Resistance to surface wear EN 438-2.10 (Revs IP ≥ 150 e A ≥ 350)</b> <b>Resistenza al calore secco (180°C) EN 438-2.16 (grado ≥ 4) / Resistance to dry heat (180°C) EN 438-2.16 (rating ≥ 4)</b> <b>Resistenza al calore umido (100°C) EN 12721 (grado ≥ 4) / Resistance to wet heat (100°C) EN 12721 (rating ≥ 4)</b> <b>Resistenza al graffio EN 438-2.25 (grado ≥ 3) / Resistance to scratching EN 438-2.25 (rating ≥ 3)</b> <b>Resistenza alle macchie EN 438-2.26 (grado 5) / Resistance to staining EN 438-2.26 (rating 5)</b> <b>Solidità dei colori alla luce EN 438-2.27 (grado ≥ 4) / Lightfastness EN 438-2.27 (rating ≥ 4)</b> <b>Resistenza alle bruciature di sigaretta EN 438-2.30 (grado ≥ 3) / Resistance to cigarette burns EN 438-2.30 (rating ≥ 3)</b>