


### RIPIANO / TOP / TISCHPLATTE / PLATEAU / SOBRE

## COP\_527

design Pedrali R&D

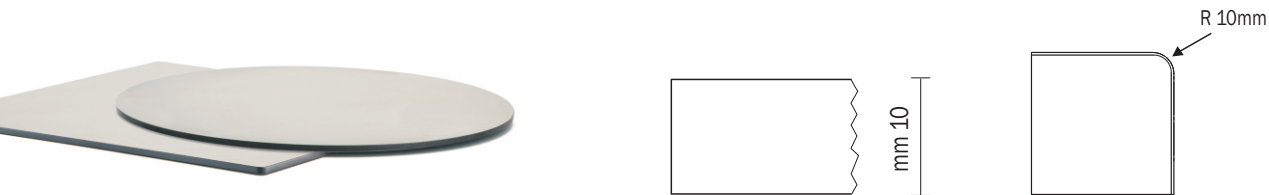

|  |  |
|--|--|
| <b>MATERIALE STRATO SUPERFICIALE</b><br>Material / Material / Matériau couche superficielle / Material | <b>Laminato, finitura gofrata</b><br>Laminate, textured finish / Laminatplatte, texturisiert / Stratifié, finition gaufrée / Laminado, acabado gofrado   |
| <b>ANIMA</b><br>Core / Kern / Coeur / Alma   | <b>Nera</b><br>Black / Schwarz / Noir / Negra  |
| <b>BORDO</b><br>Edge / Kante / Chant / Canto   | <b>Piatto</b><br>Flat / Flache / Plat / Recto  |
| <b>SPESSORE</b><br>Thickness / Stärke / Épaisseur / Espesor  | <b>10 mm (Tolleranza dimensionale ± 0,50 mm / Dimensional tolerance ± 0,50 mm)</b>   |
| <b>MISURE</b><br>Sizes / Abmessungen / Dimensions / Medidas  | * <b>Tolleranza dimensionale ± 5 mm / Dimensional tolerance ± 5 mm</b><br><br><b>Tondo</b> / Round / Runder / Rond / Redondo:<br>Ø490 mm - Ø590 mm - Ø690 mm - Ø790 mm - Ø890 mm - Ø990 mm - Ø1190 mm<br><b>Quadrato</b> / Square / Viereckig / Carré / Cuadrado:<br>590x590 mm - 690x690 mm - 790x790 mm - 890x890 mm<br><b> Rettangolare</b> / Rectangular / Rechteckig / Rectangulaire / Rectangular:<br>1090x690 mm - 1190x790 mm - 1290x790 mm - 1350x790 mm  |
| <b>UTILIZZO</b><br>Usage / Verwendung / Usage / Uso  | <b>Indoor &amp; outdoor</b>  |
| <b>NORMATIVE</b><br>Regulations / Bestimmungen / Réglementations / Normativas                          | <b>Resistenza all'abrasione EN 438-2.10 (Giri IP ≥ 150 e ≥ 350) / Resistance to surface wear EN 438-2.10 (Revs IP ≥ 150 e ≥ 350)</b><br><b>Resistenza al calore secco (180°C) EN 438-2.16 (grado ≥ 4) / Resistance to dry heat (180°C) EN 438-2.16 (rating ≥ 4)</b><br><b>Resistenza al calore umido (100°C) EN 12721 (grado ≥ 4) / Resistance to wet heat (100°C) EN 12721 (rating ≥ 4)</b><br><b>Resistenza al graffio EN 438-2.25 (grado ≥ 3) / Resistance to scratching EN 438-2.25 (rating ≥ 3)</b><br><b>Resistenza alle macchie EN 438-2.26 (grado 5) / Resistance to staining EN 438-2.26 (rating 5)</b><br><b>Solidità dei colori alla luce EN 438-2.27 (grado ≥ 4) / Lightfastness EN 438-2.27 (rating ≥ 4)</b><br><b>Resistenza alle bruciature di sigaretta EN 438-2.30 (grado ≥ 3) / Resistance to cigarette burns EN 438-2.30 (rating ≥ 3)</b> |